

FEATURES

- 3 analog/digital inputs
- 10 logic functions
- Total data saving on KNX bus failure
- Integrated KNX BCU (TP1-256)
- Dimensions 39 x 39 x 14 mm
- Can be mounted within distribution boxes or wall back boxes
- Conformity with the CE, UKCA, RCM directives (marks on the front side)

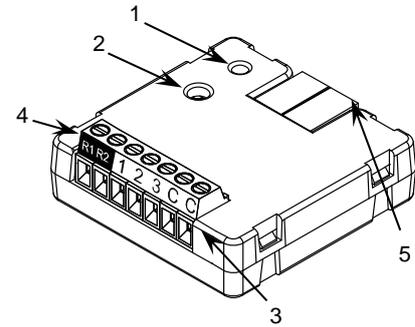


Figure 1: KLIC-PA

1. Programming LED	2. Programming button	3. Inputs
4. Air conditioning equipment connection		5. KNX connector

Programming button: short press to set programming mode. If this button is held while plugging the device into the KNX bus, it enters the safe mode.

Programming LED: programming mode indicator (red). When the device enters the safe mode, it blinks (red) every half second. During the start-up (reset or after KNX bus failure) and if the device is not in safe mode, it emits a red flash.

GENERAL SPECIFICATIONS

CONCEPT		DESCRIPTION			
Type of device		Electric operation control device			
KNX supply	Voltage (typical)		29 VDC SELV		
	Voltage range		21-31 VDC		
	Maximum consumption	Voltage		mA	mW
		29 VDC (typical)		4.1	122.09
24 VDC ¹		10	240		
Connection type		Typical TP1 bus connector for 0.8 mm Ø rigid cable			
External power supply		Not required			
Operation temperature		0 .. +55 °C			
Storage temperature		-20 .. +55 °C			
Operation humidity		5 .. 95%			
Storage humidity		5 .. 95%			
Complementary characteristics		Class B			
Protection class		III			
Operation type		Continuous operation			
Device action type		Type 1			
Electrical stress period		Long			
Degree of protection		IP20, clean environment			
Installation		Independent device to be mounted in distribution boxes or wall back boxes. It must not be installed inside the air conditioning equipment.			
Minimum clearances		Not required			
Response on KNX bus failure		Data saving according to parameterization			
Response on KNX bus restart		Data recovery according to parameterization			
Operation indicator		The programming LED indicates programming mode (red).			
Weight		30 g			
PCB CTI index		175 V			
Housing material		PC FR V0 halogen free			

¹ Maximum consumption in the worst-case scenario (KNX Fan-In model).


INPUTS SPECIFICATIONS AND CONNECTIONS	
CONCEPT	DESCRIPTION
Number of inputs	3
Inputs per common	3
Operation voltage	+3.3 VDC in the common
Operation current	1 mA @ 3.3 VDC (per input)
Switching type	Dry voltage contacts between input and common
Connection method	Screw terminal block (0.2 Nm max.)
Cable cross-section	0.5-1 mm ² (IEC) / 26-16 AWG (UL)
Maximum cable length	30 m
NTC probe length	1.5 m (extensible up to 30 m)
NTC accuracy (@ 25 °C) ²	±0.5 °C
Temperature resolution	0.1 °C
Maximum response time	10 ms

² For Zennio temperature probes.

INPUTS CONNECTION

Any combination of the following accessories is allowed in the inputs:

Temperature Probe**



Zennio temperature probe.

⚠ Commons of different devices must not be connected together.

Motion Sensor



Up to two motion sensors can be plugged into the same device input (parallel wiring)

Screw terminal for connecting Zennio motion sensors*

Switch/Sensor/ Push button



* In case of using ZN110-DETEC-P sensor, its micro switch number 2 must be in **Type B** position.

**May be a Zennio temperature probe or any NTC with known resistance values at three points in the range [-55, 150 °C].

AIR CONDITIONING EQUIPMENT SPECIFICATION AND CONNECTIONS	
CONCEPT	DESCRIPTION
Maximum cable length	30 m
Connection method	Screw terminal block (0.2 Nm max.)
Cable cross-section	0.5-1 mm ² (IEC) / 26-16 AWG (UL)



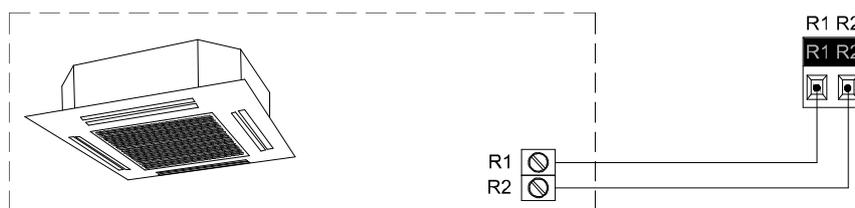


Figure 2: Wiring KLIC-PA to the Air Conditioning Equipment

DIMENSIONS (mm)

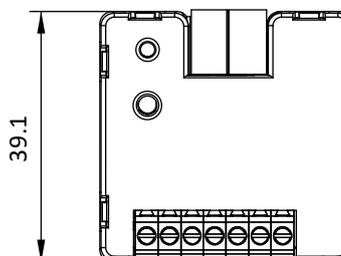

SAFETY INSTRUCTIONS AND ADDITIONAL NOTES

- Installation should only be performed by qualified professionals according to the laws and regulations applicable in each country.
- Do not connect the mains voltage nor any other external voltage to any point of the KNX bus; it would represent a risk for the entire KNX system. The facility must have enough insulation between the mains (or auxiliary) voltage and the KNX bus or the wires of other accessories, in case of being installed.
- Once the device is installed (in the panel or box), it must not be accessible from outside.
- Keep the device away from water (condensation over the device included) and do not cover it with clothes, paper or any other material while in use.
- The WEEE logo means that this device contains electronic parts and it must be properly disposed of by following the instructions at <https://www.zennio.com/en/legal/wEEE-regulation>.
- This device contains software subject to specific licences. For details, please refer to <http://zennio.com/licenses>.